


Turns Counting Dials

Series - MCD(K), MCF(K)

- b *Panel Mount (MCF)*
- b *Recessed Mount (MCD)*
- b *10 Turns (000 - 999)*
- b *Smooth Operation*
- b *High Accuracy*
- b *Digital Dial Read-Out*





Standard Dimensions

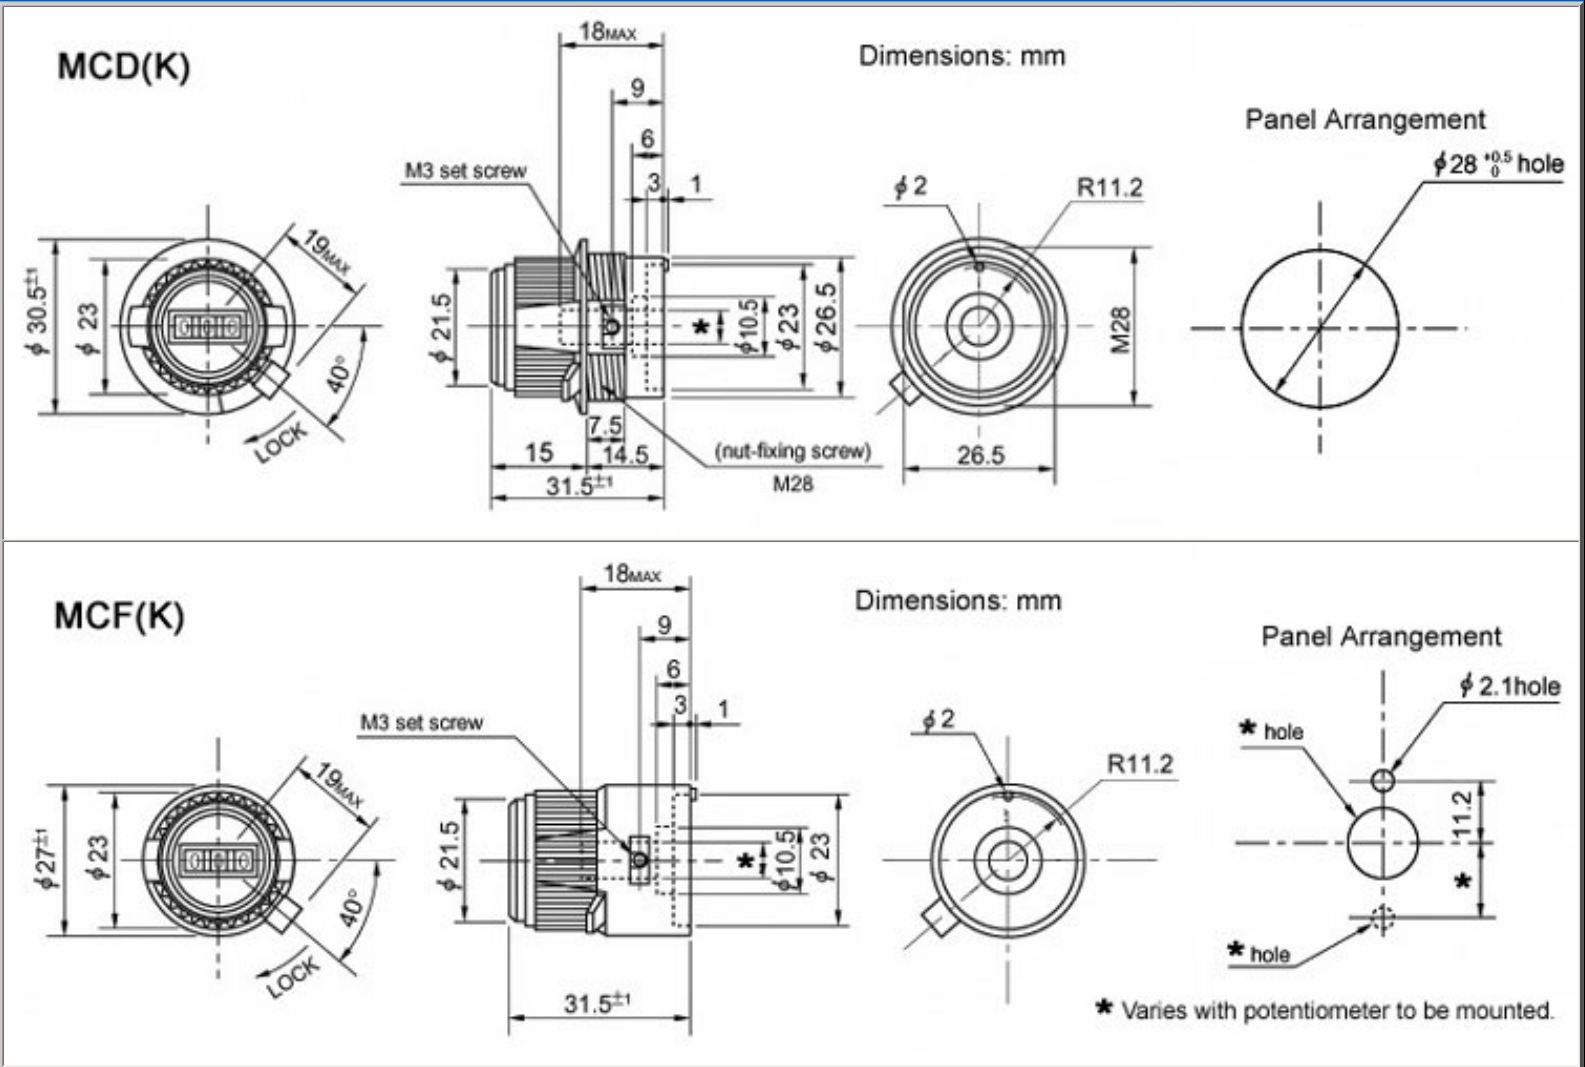

General Specifications

| | # of Turns | Matching Shaft Diameters (mm) | Combinable Potentiometers | Operating Temperature | Weight (grams) |
|-----------------|------------|-------------------------------|---|-----------------------|----------------|
| MCD, MCF | 10 | 3, 3.175, 4, 6 6.35 | All models with specified shaft diameters | -55°C to +85°C | 30 |

Mounting

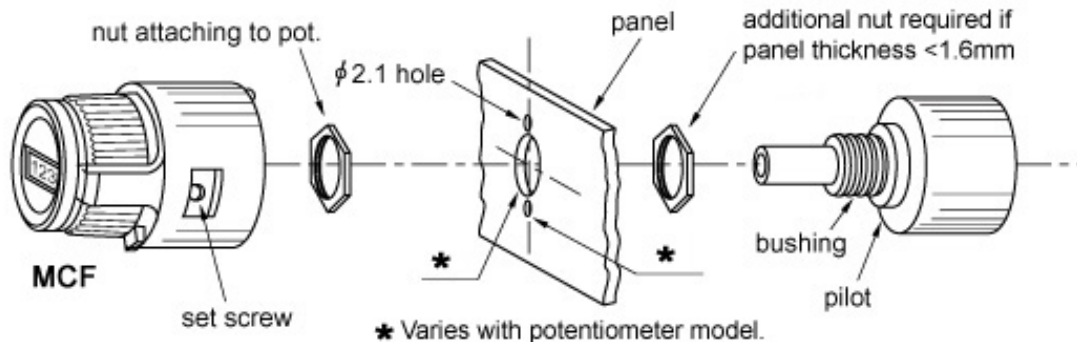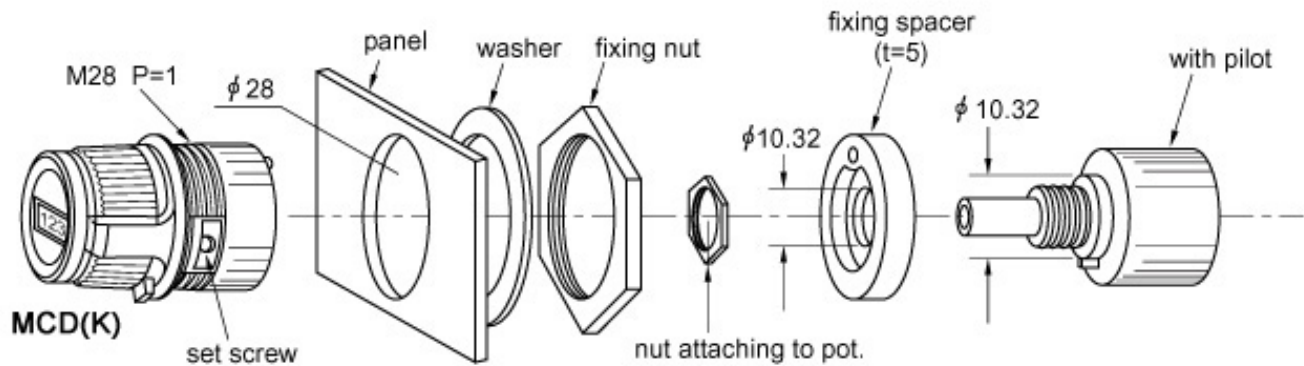

Mounting for the two dial versions (MCD, MCF) as shown in the diagrams above. Prior to tightening the dials set screw, the dial is set in the '000' position and the potentiometer shaft is rotated to the full CCW (start) position. A special hexagonal wrench is provided with the dial.

P3 America

3089C Clairemont Dr. #363 - San Diego, CA 92117

Phone: (858) 277-1420 Fax: (858) 225-0439

www.p3america.com

© P3 America 2004. All Rights Reserved