



**High Precision Range**

**Bushing Mount**

**Small Size**


- **1/2" (13mm) Diameter**
- **5 Million Turns Life**
- **Infinite Resolution**
- **1K to 100K ohms Resistance Values**

Long life, high precision potentiometer in a compact package. Available with or without mechanical end stops. Many options available.

Electrical Specifications	MP10	MP11
Electrical Angle	300 ±5°	
Resistance Value (ohms)	1k...100k	
Resistance Tolerance	±15% (±10% opt.)	
Linearity Tolerance (std.)	±2%	
Linearity Tolerance (best)	±1%	
Resolution	Essentially infinite	
Max. Voltage (V)	500	
Wiper Current	1 mA nominal	
Power @ 40° (W)	0.2	
Insulation Resistance	>1000 Mohm @ 1000 VDC	
Dielectric Strength	1 minute @ 500 VAC	
Output Smoothness	< 0.1% per MIL-R-39023	
Mechanical Specifications		
Mechanical Angle	360° (continuous)	310° ±10°
Maximum Operating Torque	0.2 (Ncm)	
Stopper Strength	-	30 (Ncm)
Life Expectancy	5 million cycles	
Max. Axial Play of Shaft	0.2 mm	
Max. Radial Play of Shaft	0.1 mm	
Vibration	15 g / 10Hz to 2,000 Hz	
Shock	50 g / 11ms	
Bearing	Sleeve bearing	
Environmental Specifications		
Operating Temperature	-55°C to +105°C	
IP Protection Grade	IP40 (IP65 optional)	
Standard	per MIL-R-12934	

Materials	
Housing	Brass, nickel plated
Shaft	Stainless steel
Bushing	Brass
Terminals	Brass, gold plated. Pin type

**Standard Dimesnisons (mm)**

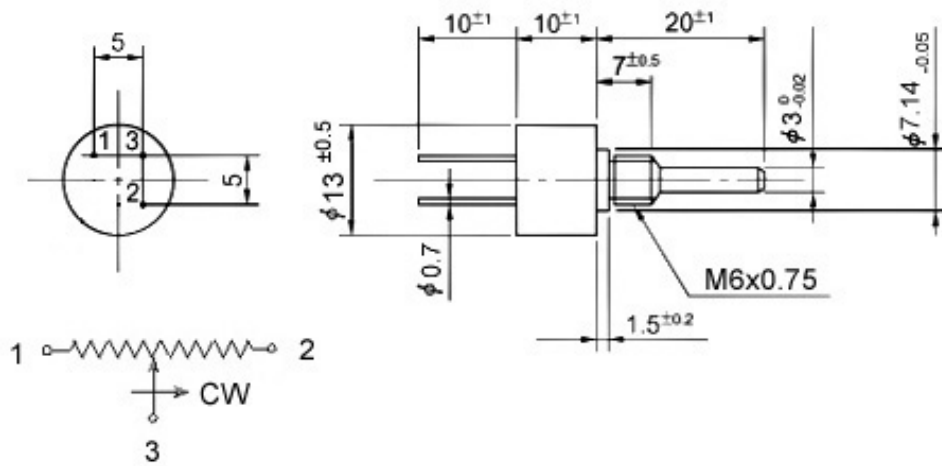

**Options**

- 1/8" shaft diameter
- Special shaft machining
- Special resistance values
- Special operating angles
- Inch dimension bushing
- Improved tolerances
- Extra tap (1 only)
- Rear shaft extension
- Sealed version

*P3 America*

3089C Clairemont Dr. #363 - San Diego, Ca. 92117

Phone:(858) 277-1420 Fax: (858) 225-0439

[www.p3america.com](http://www.p3america.com)

© P3 America 2004. All Rights Reserved